



**SINCE 1848**

# Mechanic Trucks



**KMT1-11**



**KMT2-11**

**KMT2-14**


**KMT3-14**

\* Bodies shown with optional equipment.

# Standard Features



- A)** Unique torq-isolator crane support system transfers lift forces into the full length torsion box subframe and outriggers and not the side compartments
- B)** Reinforced rear vertical curb side compartment is independent of all other side compartments, eliminating flexing and twisting of the side packs
- C)** Double paneled doors are reinforced with internal braces for durability
- D)** Vertical compartment doors employ double spring-loaded, over center retainers for elimination of involuntary swing
- E)** Thick automotive bulb-type neoprene door seals protect your compartments from the outside elements
- F)** Stainless steel, T-handle twist latch for easy opening and closing of compartments doors
- G)** All stainless steel continuous hinges for unmatched security
- H)** Master Locking System locks down all compartments on one side with one motion for an extra layer of security
- I)** Knapliner work surface bumper with lockable through compartment and two grip strut flex steps
- J)** 2 heavy duty aluminum grab handles installed on both sides at rear of the body for easy cargo area access
- K)** Recessed LED S/T/T and B/U light located at the rear of body

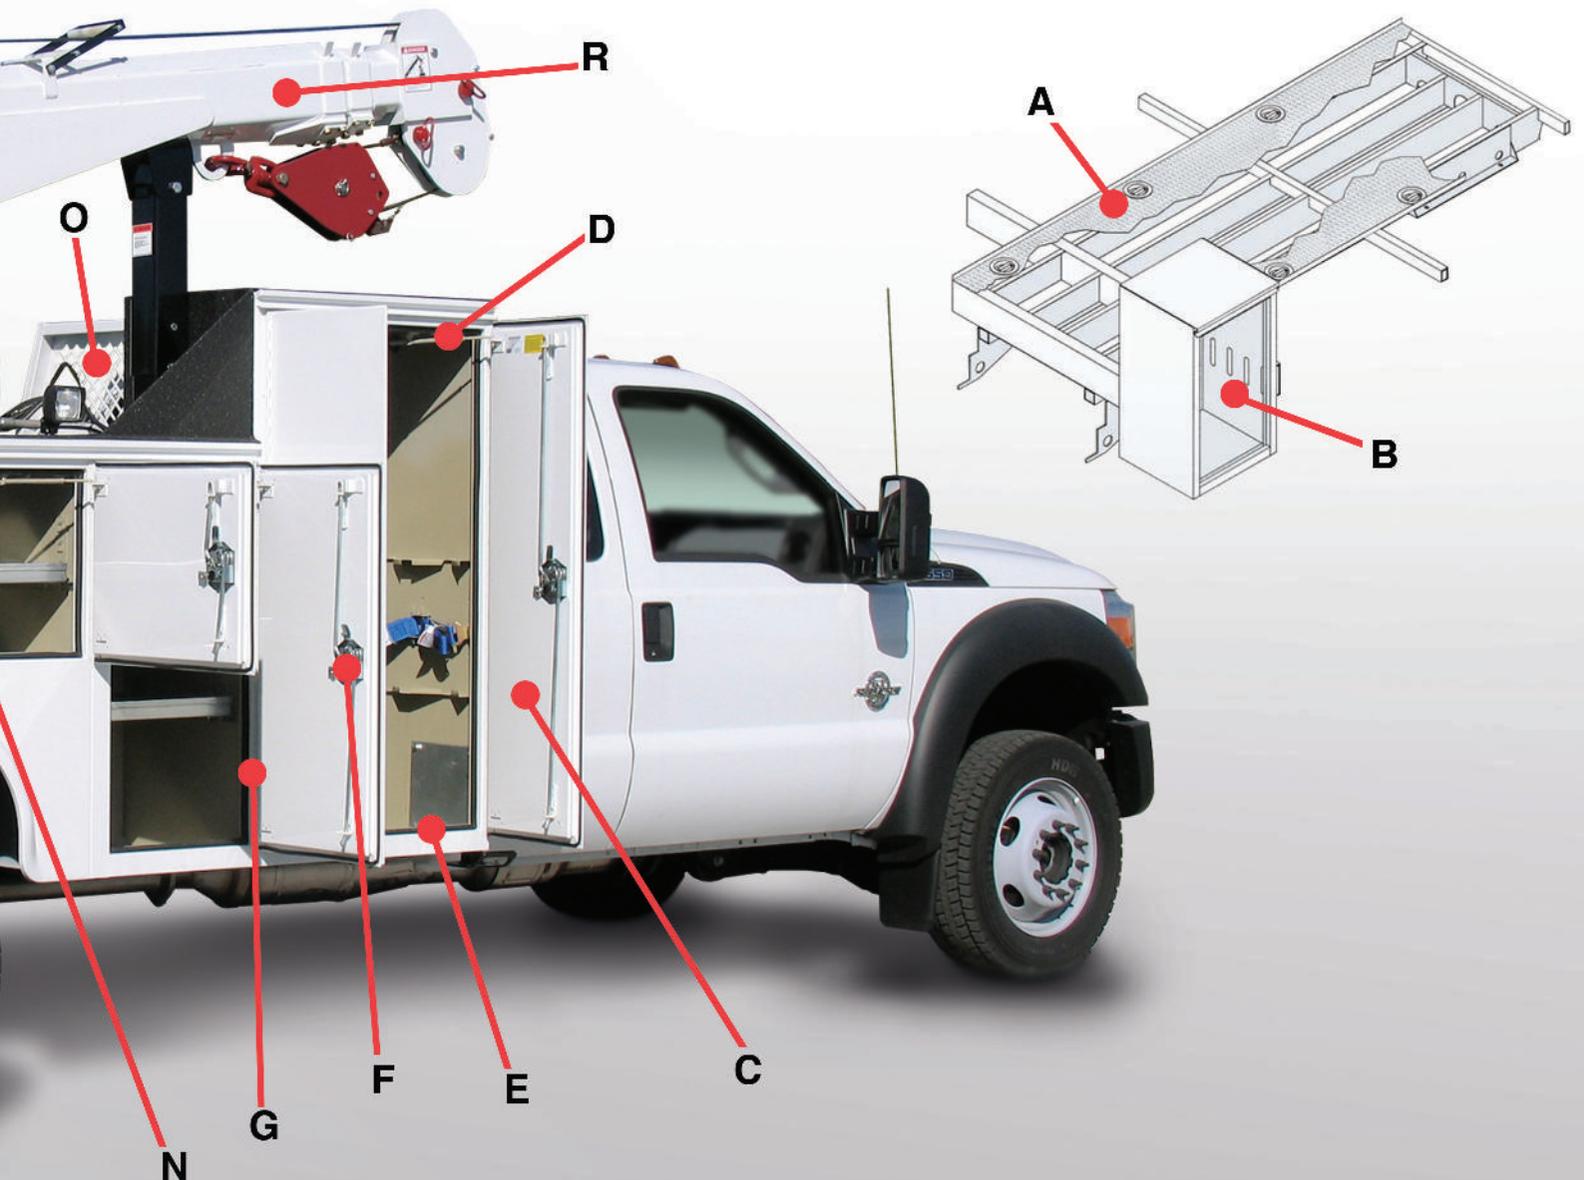

- L)** 16" high double panel slam tailgate with center latch and flat space for displaying company graphics
- M)** Knapliner applied to cargo floor, sides, compartment tops, bulkhead, and tailgate for durability
- N)** Adjustable divider shelves with a 250lb. maximum load capacity for increased organization
- O)** Bolt on cab protector with fully punched window for visibility
- P)** 4 halogen work lights installed for improved working conditions in low light conditions (2 at rear, 1 each side)
- Q)** Hydraulic out and hydraulic down outriggers for crane stability during lifting operations
- R)** Crane with 20'9" hydraulic reach provided by a two stage hydraulic extension
- S)** Planetary winch provides a 60ft/per minute single line speed
- T)** Hexagonal boom eliminates boom flex and lateral movement for ultimate stability
- U)** 36 CFM reciprocating hydraulic compressor (KMT2 & KMT3 have 35 CFM rotary screw)
- V)** 50'x 1/2" compressor hose reel and roller fairlead through curb side rear vertical compartment

And other features not shown including:

- Multi-function radio remote control provides convenient complete control of the crane
- 6 D-ring cargo tie downs installed in the cargo floor with a 6,000lb. maximum capacity
- Bodies are fully protected with Knapheide's water based undercoating
- Complete immersion in Knapheide's electrodeposition prime paint system for superior corrosion protection

# Available Models

| Model   | Recommended Chassis | Axle   | Crane                        | Compressor                  | Body Length |
|---------|---------------------|--------|------------------------------|-----------------------------|-------------|
| KMT1-11 | Class 5             | Single | 44,000 ft-lb Hydraulic Crane | 36 CFM Hydraulically Driven | 11'         |
| KMT2-11 | Class 7             | Single | 60,000 ft-lb Hydraulic Crane | 35 CFM Hydraulically Driven | 11'         |
| KMT2-13 | Class 7             | Single | 60,000 ft-lb Hydraulic Crane | 35 CFM Hydraulically Driven | 13'         |
| KMT2-14 | Class 7             | Single | 60,000 ft-lb Hydraulic Crane | 35 CFM Hydraulically Driven | 14'         |
| KMT3-14 | Class 7/8           | Single | 70,000 ft-lb Hydraulic Crane | 35 CFM Hydraulically Driven | 14'         |

# Popular Options



Welder



Lube Package



Telescopic Sliding Roof



Tarp



Codeable Padlock



Pull Out Shelves



Auxiliary Lighting



LED Compartment Lighting

# Because Rust Never Sleeps

Rust shouldn't be a concern when you buy quality Knapheide products. To give you the best protection from rust and corrosion, we installed our state of the art, custom-designed electrodeposition prime paint system. Our E-coat system bonds paint to steel by an electroplating process, to give you a superior coat of primer resulting in better corrosion protection compared to spraying methods. Complete immersion in our E-coat results in a prime coat that provides the best chemical and solvent resistance. Rust never sleeps, and neither does our E-coat protection so you should never worry about the quality of your Knapheide products.

The Knapheide Manufacturing Company  
 1848 Westphalia Strasse  
 Quincy, Illinois 62305  
**(217) 222-7131**  
[www.knapheide.com](http://www.knapheide.com)  
[knapheide@knapheide.com](mailto:knapheide@knapheide.com)



**SINCE 1848**  
 Copyright© 2011 The Knapheide Manufacturing Company

L78 5M 0112

## Crane Body



**6** Year Limited Warranty

- No rust through
- Door hinges will not fail or come off body
- Latches and lock cylinders will not fail to operate
- Shelves will not bend under max. load of 250lbs.

For more information:



Specifications subject to change without notice.  
 Some models shown with optional equipment.