

0

D

YOUR WORK. YOUR VEHICLE. TRUST



FORD



00

.

60

D

00

# KNAPHEIDE KUVcc

The style and function of a KUV, designed for a cab chassis—the KUVcc is built to get the job done.

Providing both enclosed cargo and internal compartment storage, the KUVcc gives you the most efficient and secure storage possible.

Get the use of a truck and function of a KUV all in one with the KUVcc.

# **STANDARD FEATURES**

- A Double panel rear cargo doors lock and seal into the body frame. These 20 gauge galvanneal steel doors have nitrogen gas struts, slam latches, and 9"x30" glass windows with guards.
- B Two conduit chutes to transport copper pipes, PVC, and conduit
- **C** Master Locking System for peace of mind, locks down all of the side compartments in one move
- D Bodies include 250 lb. capacity adjustable divider shelves made of rugged spangled galvanized steel. Divider slots are present on 4" centers. These shelves are covered through Knapheide's six year warranty.
- E Double spring over-center retainer on all vertical doors eliminates involuntary swing and keeps the door in positive open or closed position. This efficient design works in all temperatures and conditions.
- **F** Thick automotive bulb-type neoprene door seals protect compartments from the weather



\*Body may be shown with optional features

- G Continuous stainless steel hinge for unmatched security and corrosion resistance, backed by Knapheide's six year warranty
- H Double-shell, 20 gauge, two-sided A-40 galvanneal steel compartment doors with internal reinforcements for durability and long life
- I Refined, automotive quality, paddle activated rotary style latches make opening and closing easy. Low maintenance and stylish, the latches are covered under Knapheide's six year warranty.

Interior covers secure the latch to the door and protects latch mechanisms from being damaged.

J Rugged 14 gauge two-sided A-40 galvanneal steel body shell with a six year warranty. Complete undercoating provides an additional layer of corrosion protection.

- K Complete immersion in Knapheide's electrodeposition prime paint system for superior corrosion resistance
- L Flat panel space provides rolling billboard to promote business
- M Two interior dome lights in cargo area for improved visibility in low light conditions, light switch located inside rear cargo area
- N Spacious cargo area for transporting oversized tools and equipment

#### Other features (not pictured):


- Interior light guards provide protection for recessed lighting and wiring package
- All compartments can be locked independently for maximum security




### 56" CA SINGLE REAR WHEEL

Model	Body Length	Body Height	Body Width	Compartment Depth	Clear Door Width	Clear Door Height	Interior Clear Height	Body Weight
KC96U1478J	97.25"	62"	78"	14.5"	44.5"	38.1"	45.1"	1,627 lbs.
KC96L1478J	97.25"	68"	78"	14.5"	44.5"	41.1"	51.1"	1,747 lbs.
KC96M1478J	97.25"	78"	78"	14.5"	44.5"	50.5"	61.1"	1,770 lbs.


Applicable Chassis	Cab	Wheelbase	GVWR
X2A	Super	158"	9,600/10,000 lbs.
F3A/F3B	Regular	137"	10,400/11,200 lbs.
X3A/X3B	Super	158"	10,200/11,500 lbs.
W3A/W3B	Crew	172"	10,200/11,500 lbs.






Model	Body Length	Body Height	Body Width	Compartment Depth	Clear Door Width	Clear Door Height	Interior Clear Height	Body Weight
KC96U2094J	97.25"	62"	94"	20"	49.5"	38.1"	45.1"	1,753 lbs.
KC96L2094J	97.25"	68"	94"	20"	49.5"	41.1"	51.1"	1,891 lbs.
KC96M2094J	97.25"	78"	94"	20"	49.5"	50.5"	61.1"	1,914 lbs.
KC96H2094J	97.25"	90"	94"	20"	49.5"	63.1"	73.1"	2,032 lbs.

Applicable Chassis	Cab	Wheelbase	GVWR
F3C/F3D	Regular	137"	12,200/13,000 lbs.
W2A	Crew	172"	12,600/13,000 lbs.
F3A/F3B	Regular	137"	12,600/13,000 lbs.






### 60" CA SINGLE REAR WHEEL


Model	Body Length	Body Height	Body Width	Compartment Depth	Clear Door Width	Clear Door Height	Interior Clear Height	Body Weight
KC108U1478J	107.25"	62"	78"	14.5"	44.5"	38.1"	45.1"	1,648 lbs.
KC108L1478J	107.25"	68"	78"	14.5"	44.5"	41.1"	51.1"	1,773 lbs.
KC108M1478J	107.25"	78"	78"	14.5"	44.5"	50.5"	61.1"	1,799 lbs.

Applicable Chassis	Cab	Wheelbase	GVWR
F3E/F3F	Regular	141"	9,800/11,000 lbs.
X3E/X3F	Super	162"	9,800/11,500 lbs.
W3E/W3F	Crew	176"	9,800/11,000 lbs.

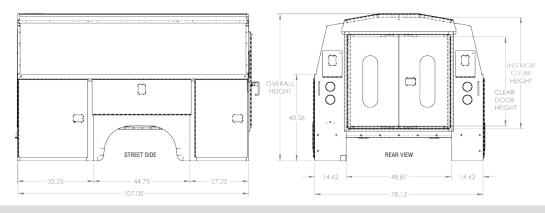


Model	Body Length	Body Height	Body Width	Compartment Depth	Clear Door Width	Clear Door Height	Interior Clear Height	Body Weight
KC108L2094J	107.25"	68"	94"	20"	49.5"	41.1"	51.1"	2,093 lbs.
KC108M2094J	107.25"	78"	94"	20"	49.5"	50.5"	61.1"	2,112 lbs.
KC108H2094J	107.25"	90"	94"	20"	49.5"	63.1"	73.1"	2,232 lbs.


Applicable Chassis	Cab	Wheelbase	GVWR
F3G/F3H	Regular	141"	13,300 lbs.
X3G/X3H	Super	162"	13,300 lbs.
W3G/W3H	Crew	176"	13,300 lbs.
F4G/F4H	Regular	141"	15,000/16,500 lbs.
X4G/X4H	Super	162"	15,000/16,500 lbs.
W4G/W4H	Crew	176"	15,000/16,500 lbs.
F5G/F5H	Regular	141"	17,500/19,500 lbs.
X5G/X5H	Super	162"	17,500/19,500 lbs.
W5G/W5H	Crew	176"	17,500/19,500 lbs.

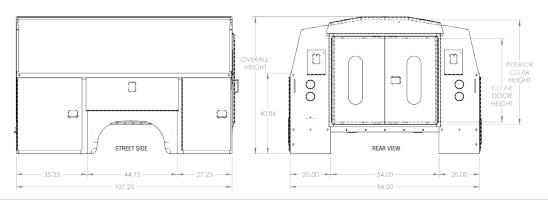

Model	Body Length	Body Height (H)	Body Width	Compartment Depth	Clear Door Width	Clear Door Height	Interior Clear Height	Body Weight
KC132L2094J	133.25"	68"	94"	20"	49.5"	41.1"	51.1"	2,506 lbs.
KC132M2094J	133.25"	78"	94"	20"	49.5"	50.5"	61.1"	2,532 lbs.
KC132H2094J	133.25"	90"	94"	20"	49.5"	63.1"	73.1"	2,652 lbs.

Applicable Chassis	Cab	Wheelbase	GVWR
F3G/F3H	Regular	165"	13,300 lbs.
F4G/F4H	Regular	165"	15,000/16,500 lbs.
X4G/X4H	Super	186"	15,000/16,500 lbs.
W4G/W4H	Crew	200"	15,000/16,500 lbs.
F5G/F5H	Regular	165"	17,500/19,500 lbs.
X5G/X5H	Super	186"	17,500/19,500 lbs.
W5G/W5H	Crew	200"	17,500/19,500 lbs.







## 108" CA DUAL REAR WHEEL


Model	Body Length	Body Height	Body Width	Compartment Depth	Clear Door Width	Clear Door Height	Interior Clear Height	Body Weight
KC157M2094J	157.25"	78"	94"	20"	49.5"	50.5"	61.1"	2,886 lbs.
KC157H2094J	157.25"	90"	94"	20"	49.5"	63.1"	73.1"	2,912 lbs.


Applicable Chassis	Cab	Wheelbase	GVWR
F4G/F4H	Regular	189"	15,000/16,500 lbs.
F5G/F5H	Regular	189"	17,500/19,500 lbs.



Model	Body Length	Body Height	Body Width	Compartment Depth	Clear Door Width	Clear Door Height	Interior Clear Height	Body Weight
KC169M2094J	169.25"	78"	94"	20"	49.5"	50.5"	61.1"	3,063 lbs.
KC169H2094J	169.25"	90"	94"	20"	49.5"	63.1"	73.1"	3,126 lbs.

Applicable Chassis	Cab	Wheelbase	GVWR
F4G/F4H	Regular	201"	15,000/16,500 lbs.
F5G/F5H	Regular	201"	17,500/19,500 lbs.

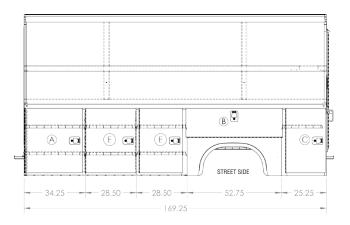





# **POPULAR OPTIONS**



Power Locks



Codeable Padlock



**Rear Vision Camera** 



Aluminum Drawers



Upper Side Glass



Sortimo



Solid Rear Doors



Knapliner Rear Bumper



Pull Out Tray



Power Liftgate



Class V Receiver Hitch





Spitzlift

Power Ladder Rack



Side Access Door



Mechanics Vise Bracket

3 Bow Ladder Rack



Side Mount Ladder Rack



# **COMMITMENT TO CORROSION RESISTANCE**

Corrosion shouldn't be a concern when you buy quality Knapheide products. To give you the best protection from corrosion, we installed our state-of-the-art, customdesigned electrodeposition prime paint system.

Our E-coat system bonds prime paint to steel by an electroplating process, to give you a superior coat of primer resulting in better corrosion protection compared to spraying methods. Complete immersion in our E-coat results in a prime coat that provides the best chemical and solvent resistance.

Because of our commitment to corrosion resistance, you should never worry about the quality of your Knapheide products.





The Knapheide Manufacturing Company 1848 Westphalia Strasse | Quincy, Illinois 62305

(217) 222-7131

www.knapheide.com

😡 knapheide@knapheide.com

#### For more information:

Copyright© 2015 The Knapheide Manufacturing Company

SINCE 1848

Since 1848, The Knapheide Manufacturing Company has continued to be an industry leader, with a vast distribution network and expert staff ready to help.

Specifications subject to change without notice. Some models shown with optional equipment.